

First Course

Astier Guillaume, Lefebvre Loic, Morit Luca

26/09/2025



Contents

Operating_system	3
Definition	3
What's in it :	4
Linux	4
History	4
Multics (1965)	4
UNIX (1973)	4
FSF (1978)	4
BSD (1979)	5
Minix (1980)	5
Linux (1991)	5
GNU/Linux (1992)	5
History of Unix / Linux	5
fun fact 1 : bottle in the sea	5
fun fact 2 : Name	5
The Linux distribution	7
Install Linux ?	7
Linux vs the World	7
The part of Linux	7
Definition	7
File system	7
Windows	8
Linux	8
Detail of linux tree	8
Scop on linux tree	9
Using commands	9
man - RTFM	9
command	10
Argument / option	10
--help	11
-h	11

Special path characters	12
Prompt	12
Where am i ?	12
Navigate	12
How to reach a file	13
Absolute path	13
Relative path :	13
Create / Move / Delete	13
Create a file	13
touch create file	14
touch modify a file	14
Stat	14
Option and argument	15
COPY	15
MOVE	15
DELETE EMPTY DIRECTORY	15
DELETE NON EMPTY DIRECTORY	16
DELETE FILES	16
File types	16
Physical files	16
Directories	17
Physical links	17
Symbolic links	17
File permissions	18
User Group and Other	18
Octal write base	18
All Octal write	19
How to change the rights	19
User root	19
GOD MODE	19
su	20
sudo	20
User and group management	20
Login	20

/etc/passwd file	21
/etc/shadow file	21
/etc/group file	21
User and group management	22
useradd	22
adduser	22
How to change the owner of a file	23
How to change the group of a file	23
Edition under LINUX/UNIX in text mode	23
Advantages	23
Disadvantages	24
Terminal-style text editor	24
Vim Basics	24
Modes in VIM	24
Interactive mode	24
Insert mode	27
Command Mode	27
Executing a Command in VIM	27
action on the file	28

Operating_system

Definition

An operating system (OS) is the program that, after being initially loaded into the computer by a boot program, manages all of the other application programs in a computer

An operating system brings powerful benefits to computer software and software development. Without an operating system, every application would need to include its own user interface

we can make the parallel between the arcade game terminals which have their own non-interchangeable systems and our computers which can launch several programs in parallel without changing operating systems

What's in it :

- Interface with hardware: processor, storage spaces, peripherals ...
- Multi-tasking management: management of process launches and stops, priority management ...
- Memory management: management of allocations and releases, management of virtual memory (swapping, paging) ...
- User interface: provision of a command language, management of user contexts.
- Security management: access rights management, user management (password) ...

Linux

LINUX: An open source operating system forked from Minix

- Free implementation of Unix
- Developed by Linus Torvalds since 1991
- Core maintained and in perpetual evolution
- FSF (Free Software Foundation) to promote free software.
- Free means open source but not necessarily gratis
- the GNU project (Gnu's not Unix) GNU General Public License (GPL)

History**Multics (1965)**

Ken Thompson and **Dennis RITCHIE** created **Multics** (*MULTiplexed Information and Computing Service*) for Bell (AT&T firm)

UNIX (1973)

Denis Ritchie created TCP/IP Protocol and re-write UNIX (from Multics in C language)

FSF (1978)

Richard Stallman created **FSF** (Free Software Foundation). FSF want to create and open source operating system.

BSD (1979)

Bill Joy created BSD, a fork of Unix for university (berkeley)

Minix (1980)

Andrew Stuart Tanenbaum created Minix for educational purposes. it's a Unix-like operating system based on a microkernel architecture

Linux (1991)

Linus Torvalds created linux inspired by **Tanenbaum's** work on minix

GNU/Linux (1992)

First version of Linux (0.01) was under its own licence. The first version in GNU GPL is 0.99

History of Unix / Linux

fun fact 1 : bottle in the sea

Here is the original post (Usenet) of Linus Torvalds to the newsgroup "comp.os.minix.":[16]

fun fact 2 : Name

Linus Torvalds had wanted to call his invention Freax, a portmanteau of "free", "freak", and "x" (as an allusion to Unix).

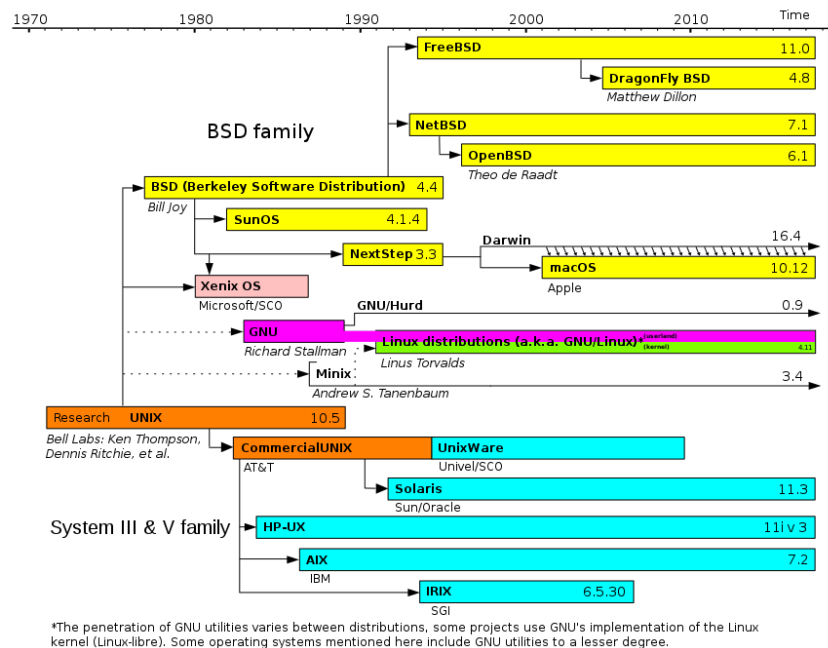


Figure 1: unix-tree

```

From: torvalds@klaava.Helsinki.FI (Linus Benedict Torvalds)
Newsgroups: comp.os.minix
Subject: What would you like to see most in minix?
Summary: small poll for my new operating system
Message-ID:
Date: 25 Aug 91 20:57:08 GMT
Organization: University of Helsinki

Hello everybody out there using minix -

I'm doing a (free) operating system (just a hobby, won't be big and
professional like gnu) for 386(486) AT clones. This has been brewing
since april, and is starting to get ready. I'd like any feedback on
things people like/dislike in minix, as my OS resembles it somewhat
(same physical layout of the file-system (due to practical reasons)
among other things).

I've currently ported bash(1.08) and gcc(1.40), and things seem to work.
This implies that I'll get something practical within a few months, and
I'd like to know what features most people would want. Any suggestions
are welcome, but I won't promise I'll implement them :-)
```

Linus (torvalds@kruuna.helsinki.fi)

```

PS. Yes - it's free of any minix code, and it has a multi-threaded fs.
It is NOT protable (uses 386 task switching etc), and it probably never
will support anything other than AT-harddisks, as that's all I have :-).
```

Figure 2: post

The Linux distribution

Install Linux ?

When you have to switch to Linux , you come across the notion of Linux distribution . Initially, this is not necessarily very clear, especially since you have to quickly choose which Linux distribution to install.

Linux vs the World

Unlike Windows or MacOSX, Linux is not owned by any organization, company or publisher.

Linux is under the GNU license and the code is free. There is a differences between Linux and a Distribution (ubuntu, debian, red hat ...)

The part of Linux

Thus, different groups of developers and volunteers helped by computer companies each develop free projects.

In Linux, there are various open source software:

- The Linux kernel is the heart of the operating system.
- The GNU shell utilities in graphic or in terminal and the different commands that we enter
- The X server that produces a graphical desktop
- and the desktop environment that runs on the X server to provide a graphical desktop

Definition


A Linux distribution harmonizes all these sets to provide specific versions of free software. It also offers installation software to allow you to install Linux on a PC, tablet or other types of devices. Then, in order not to have to compile each software, it offers a system of packages .

File system


FileSystem Hierarchy Standard or it defines the tree structure and the contents of the main directories of the file systems of the GNU / Linux operating systems and of most Unix systems. We are at version 3 since 2015

Windows

FILE SYSTEM

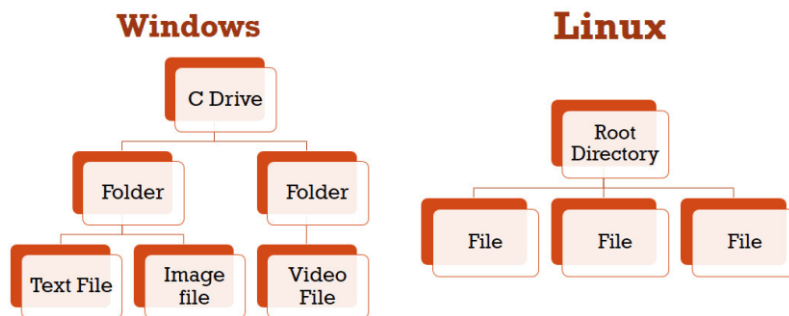

Linux

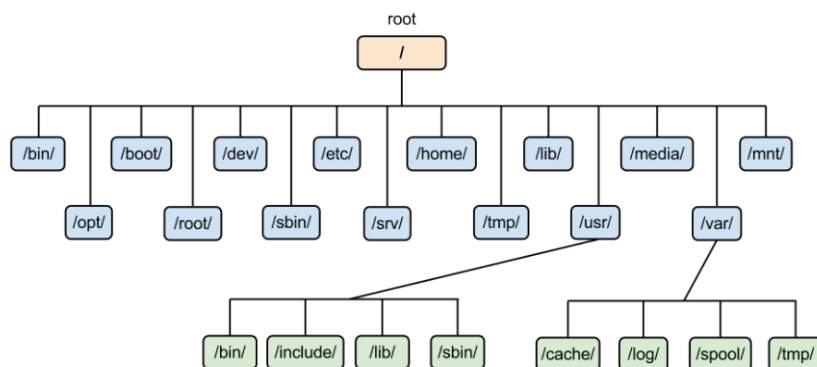


Detail of linux tree

Directory	Contenu
/bin	Binaries (executables = essential commands)
/boot	Static files for the boot loader
/dev	Device Driver Files
/etc	System configuration files
/home	User personal directories

Directory	Contenu
/lib	Shared libraries and essential kernel modules
/media or /mnt	Mount points for removable media
/proc	Virtual directory for system information
/root	Home directory for the root user
/sbin	Essential System Executable
/tmp	Temporary files
/usr	Secondary hierarchy
/var	Variable data
/opt	Directory for other software

Scop on linux tree

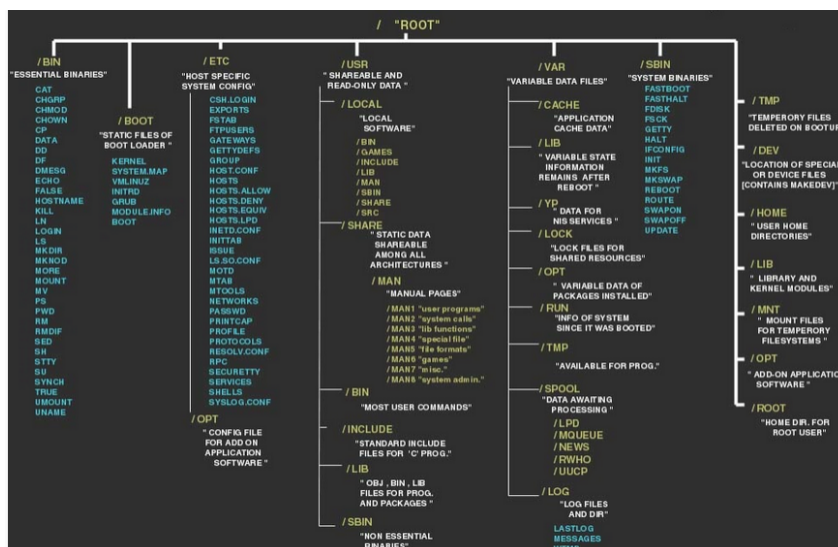

Using commands

man - RTFM

The man command is a built-in manual for using Linux commands. It allows users to view the reference manuals of a command or utility run in the terminal.

The man page (short for manual page) includes a command description, applicable options, flags, examples, and other informative sections

command

the vast majority of linux command have a man.

So if you want to know who to use a command you just simply prepended your command to man :

```
1 username@hostname:/tmp$ man ls
2 LS(1)                                User Commands
3
4 LS(1)
5
6 NAME
7     ls - list directory contents
8
9 SYNOPSIS
10    ls [OPTION]... [FILE]...
11
12 DESCRIPTION
13    List information about the FILES (the current directory by default)
14    .
15    Sort entries alphabetically if none of -cftuvSUX nor --sort is
16    specified.
17
18    Mandatory arguments to long options are mandatory for short
19    options too.
20
21    -a, --all
22        do not ignore entries starting with .
23
24    -A, --almost-all
25        do not list implied . and ..
26
27    --author
28        with -l, print the author of each file
```

Argument / option

when you type commands on a terminal, you must enter arguments or options.

```
1 username@hostname:/tmp$ ls -l /tmp
```

Here we have :

- '-l' : it's an option

- `/tmp/` : it's an argument

In fact they are both arguments but the command understand that `-l` is an option and `/tmp/` is an argument.

--help

the vast majority of linux command have an option `-h` or `--help`

This option (but in fact an argument) allow you to see a simple summary of the command options

```

1 username@hostname:/tmp$ ls --help
2 Utilisation : ls [OPTION]... [FICHIER]...
3 Afficher des renseignements sur les FICHIERS (du répertoire actuel par
  défaut).
4 Trier les entrées alphabétiquement si aucune des options -cftuvSUX ou
  --sort
5 ne sont utilisées.
6
7 Les arguments obligatoires pour les options longues le sont aussi pour
  les
8 options courtes.
9   -a, --all                ne pas ignorer les entrées débutant par .
10  -A, --almost-all        ne pas inclure . ou .. dans la liste
11      --author              avec -l, afficher l'auteur de chaque
                           fichiers

```

-h

```

1 username@hostname:/tmp$ useradd -h
2 Utilisation : useradd [options] LOGIN
3                 useradd -D
4                 useradd -D [options]
5
6 Options :
7     --badnames          do not check for bad names
8   -b, --base-dir REP_BASE  répertoire de base pour le répertoire
                           personnel
9
10     --btrfs-subvolume-home  du compte du nouvel utilisateur
                           use BTRFS subvolume for home directory
11   -c, --comment COMMENTAIRE  définir le champ « GECOS » du compte du
12 [...]

```

Special path characters

- “.” (dot) : current directory
- “..” (dot dot) : is the top directory (parent directory)
- “~” (tilde) : is the directory of the logged user
- “~username” : is the directory of the user

Prompt

The default BASH prompt is the one you see when you first open a terminal or command line. It usually looks something like this:

```
1 username@hostname:~$
```

- if you see a \$: you are a simple user
- if you see a # : you are a root (so be careful!)

Where am i ?

```
1 username@hostname:~$
```

With this prompt, you have a clue of where you are in the tree line

The default PROMPT (PS1) have just before the login type (user/root) your actual tree line

“~” is your HOME DIRECTORY : /home/username

if you have doubts use the command : `pwd`

```
1 username@hostname:~$ pwd
2 /home/username
```

Navigate

Change current directory : `cd` “Change Directory”

Display the name of the current directory : `pwd` “Print Working Directory”

How to reach a file

Absolute path

```
1 username@hostname:~$ cd /home/username/Documents
2 username@hostname:~/Documents$ pwd
3 /home/username/Documents
4 username@hostname:~$ cd /tmp
5 username@hostname:/tmp$ pwd
6 /tmp
```

We can see that the path is complete from the first FSH folder. Therefore it is understandable on the whole tree structure of the files.

We can say : “from slash”

Relative path :

```
1 username@hostname:~$ cd ./Documents/videos
2 username@hostname:~/Documents/videos$ pwd
3 /home/username/Documents/videos
4 username@hostname:~/Documents/videos$ cd ../
5 username@hostname:~/Documents$ pwd
6 /home/username/Documents
```

Here the two examples depend on the current directory

Create / Move / Delete

- `cp` “CoPy” ==> Copy a file
- `mv` “MoVe” ==> Move or rename files
- `rm` “ReMove” ==> Delete a file
- `ls` “LiSt” ==> List the files in a directory
- `mkdir` “MaKe DIRectory” ==> Create a directory
- `rmdir` “ReMove DIRectory” ==> Delete an empty directory

Create a file

On linux you have a lot if possibility to create a file:

- with an application with ‘save as’

- with a CLI application
- with a redirecting the information in a file
- or simply using the 'touch' command

touch create file

touch allow you to create a file if it do not exist

```
1 username@hostname:~$ ls
2 Document
3 username@hostname:~$ touch MyFile
4 username@hostname:~$ ls
5 Document
6 MyFile
```

touch modify a file

touch allow you to modify the 'modification date' of a file if it exist

```
1 username@hostname:~$ touch MyFile
2 username@hostname:~$ stat ./MyFile
3 [...]
4 Modif. : 2022-08-22 18:06:13.555251643 +0200
5 [...]
6 username@hostname:~$ touch MyFile
7 username@hostname:~$ stat ./MyFile
8 [...]
9 Modif. : 2022-08-22 18:07:25.805479158 +0200
10 [...]
```

Stat

```
1 username@hostname:~$ stat ./MyFile
2 Fichier : MyFile
3 Taille : 0          Blocs : 0          Blocs d'E/S : 4096  fichier
   vide
4 Périphérique : fd01h/64769d  Inode : 17961180  Liens : 1
5 Accès : (0664/-rw-rw-r--)  UID : ( 1000/username)  GID : ( 1000/
   username)
6 Accès : 2022-08-22 18:21:26.346538143 +0200
7 Modif. : 2022-08-22 18:21:26.346538143 +0200
8 Changt : 2022-08-22 18:21:26.346538143 +0200
9 Créé : 2022-08-22 18:21:26.346538143 +0200
```

Option and argument

For all the next command you have to use this template : COMMAND ORIGIN DESTINATION

COPY

to copy an existing file :

```
1 username@hostname:~$ cp MyFile MyCopyFile
```

to copy an existing directory :

```
1 username@hostname:~$ man cp
2 [...]
3     -R, -r, --recursive
4         copy directories recursively
5 [...]
6 username@hostname:~$ cp /home/username/Documents ./BackupDocument
7 username@hostname:~$ ls
8 Documents BackupDocument MyFile MyCopyFile
```

Here, i am using COPY from an absolute path to a relative path

MOVE

Move can be used to move a file a rename it :

```
1 username@hostname:~/Documents $ ls
2 OrigFile
3 username@hostname:~/Documents $ mv /home/username/Documents/OrigFile ./
  RenameFile
4 username@hostname:~/Documents $ ls
5 RenameFile
```

DELETE EMPTY DIRECTORY

to delete a directory you have to use : **rmdir** This command allow you to delete directory only.

```
1 username@hostname:~ $ ls -l
2 drwxrwxr-x 2 username username 4096 août 31 11:53 NormalDirEmpty
3 username@hostname:~ $ ls -l NormalDirEmpty/
4 total 0
5 username@hostname:~ $ rmdir NormalDirEmpty
6 username@hostname:~ $ ls -l
7 total 0
```

DELETE NON EMPTY DIRECTORY

```
1 username@hostname:~ $ ls -l
2 drwxrwxr-x 2 username username 4096 août 31 11:53 NormalDir
3 username@hostname:~ $ ls -l NormalDir/
4 total 0
5 -rw-rw-r-- 1 username username 0 août 31 11:53 NormalFile
6 username@hostname:~ $ rmdir NormalDir
7 rmdir NormalDir/
8 rmdir: impossible de supprimer 'NormalDir/': Le dossier n'est pas vide
```

DELETE FILES

to delete a file you have to use : **rm**

This command allow you to delete files and directory.

```
1 username@hostname:~ $ man rm
2 [...]
3 -r, -R, --recursive
4     remove directories and their contents recursively
5 [...]
6 username@hostname:~ $ ls -l
7 drwxrwxr-x 2 username username 4096 août 31 11:53 NormalDir
8 username@hostname:~ $ ls -l NormalDir/
9 total 0
10 -rw-rw-r-- 1 username username 0 août 31 11:53 NormalFile
11 username@hostname:~ $ rm -r NormalDir
12 username@hostname:~ $ ls -l
13 total 0
```

File types

On UNIX systems everything is represented as a file. The different types of files are:

- Physical files: (-: normal file)
- The directories: (d: directory)
- Physical and symbolic links
- Special files

Physical files

A physical files are the usual files on Linux. They could be text, videos, raw, database ...

```
1 username@hostname:~/NormalDir$ ls -l
2 total 2508
3 -rw-r--r-- 2 guillaume guillaume 1234 août 30 13:57 NormalFile.txt
4 -rw-r--r-- 2 guillaume guillaume 4567 août 30 13:58 NormalFile.mkv
5 -rw-r--r-- 2 guillaume guillaume 7890 août 30 13:59 NormalFile.doc
```

Directories

A directory ... like on all other operating system ...

```
1 username@hostname:~/EmptyDir$ ls -la
2 total 2524
3 drwxrwxr-x 3 guillaume guillaume 4096 août 31 11:10 .
4 drwxrwxr-x 22 guillaume guillaume 12288 août 31 11:10 ..
```

. : current directory .. : parent directory -a : All files (classic files and hidden files)

Physical links

Allows you to give several names / access paths to the same file by pointing to a file number. A file can therefore have several names, and will exist as long as it has at least one name.

The file number is contained in the inode table. The inode is the hard disk database for files and directory path.

The command to use for a **Physical links** is : **ln**

```
1 username@hostname:~/LinkDir$ ls -l
2 total 2508
3 -rw-r--r-- 1 guillaume guillaume 1280601 août 30 13:59 OriginFile
4 username@hostname:~/LinkDir$ ln ./OriginFile ./PhysicalLinkFile
5 username@hostname:~/LinkDir$ ls -l
6 total 2508
7 -rw-r--r-- 2 guillaume guillaume 1280601 août 30 13:59 OriginFile
8 -rw-r--r-- 2 guillaume guillaume 1280601 août 30 13:59
   PhysicalLinkFile
```

Symbolic links

A symbolic link is a file that points to another file.

If you delete the target file, the link is “dead”

If you remove the link, the target file is not impacted.

This is the closest thing to a shortcut in Windows.

```
1 username@hostname:~/LinkDir$ ls -l
2 total 2508
3 -rw-r--r-- 1 guillaume guillaume 1280601 août 30 13:59 OriginFile
4 username@hostname:~/LinkDir$ ln -s ./OriginFile ./SymbolicLinkFile
5 username@hostname:~/LinkDir$ ls -l
6 -rw-r--r-- 1 guillaume guillaume 1280601 août 30 13:59 OriginFile
7 lrwxrwxrwx 1 guillaume guillaume 24 août 31 11:21
   SymbolicLinkFile -> OriginFile
```


File permissions

User Group and Other

On linux ALL the write are based on 3 notions :

- user
- group
- other

Octal write base

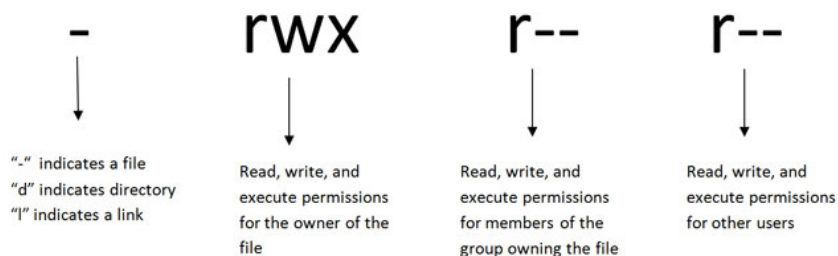

All Octal write

	u g o		
	754		
	/ \		
access	r w x	r w x	r w x
binary	4 2 1	4 2 1	4 2 1
enabled	1 1 1	1 0 1	1 0 0
result	4 2 1	4 0 1	4 0 0
total	7	5	4

How to change the rights

The `chmod` command allows you to change the access permissions of a file or directory

- `chmod g+w fic1`
- `chmod o-x rep`
- `chmod u+rx,g-w fic2`
- `chmod u=rwx,g=rx,o=- fic`
- `chmod -R a+r rep2`
- `chmod 750 fic3`

User root

GOD MODE

On any UNIX system, there is a superuser, usually called `root`, who has full authority.

He can freely access *ALL* the resources of the machine.

This user has their UID and GID set to 0.

```
root:x:0:0:root:/root:/bin/bash
```

su

su is the command which allows to change user

Exemple :

```
1 username@hostname:~$ whoami
2 username
3 username@hostname:~$ su - root
4 password :
5 root@hostname:~# whoami
6 root
```

sudo

sudo is the command that allows you to perform an action in the context of another user. To configure sudo you need to edit the /etc/sudoers files

Switch User DO

Example :

```
1 username@hostname:~$ whoami
2 username
3
4 username@hostname:~$ sudo -u root whoami
5 [sudo] username password :
6 root
```

User and group management

Login

When a user logs in, he provides a login name and password.

If the connection is successful, a shell is launched and the user is in his working directory, which is initially his login directory.

This information is placed in the /etc/passwd, /etc/shadow and /etc/group files.

```
1 Linux login : gastier
2 Password:
3 Last login: Sun Nov 1 12:07:37 CET 2017 on pts/3
4 Linux anakin 5.8.0-59
5 You have new mail.
6 gastier@watchmen:~$
```

/etc/passwd file

login:passwd:UID:GID:GICOS:homedir:shell

- *login*: login name
- *passwd*: clear password or x if the password is hashed and therefore stored in the shadow file
- *UID* (User Identification): user identification number
- *GID* (Group Identification): number of the user's group
- *GCOS*: description, usually contains the first and last name
- *homedir* (home directory): connection directory
- *shell*: command to be executed during connection (usually the command interpreter: / bin / bash)

/etc/shadow file

user1:1Sh1R1/Sl\$FfPQjULAhevhi4n7AV.xg.:14393:0:99999:7:::

- login name
- hashed password
- date of the last password change
- number of days to wait before being able to change the password
- number of days after which the password must be changed
- number of days before the expiration of the password and during which the user is notified
- date since which the account is deactivated
- expiry date of the account
- reserved field

/etc/group file

groupname:passwd:GID:members

- *groupname*: The name of the group

- *passwd*: encrypted password
- *GID* (Group Identification): group identifier
- *members*: members of the group, separated by a comma
 - Exemple : *isen:x:1000:alice,kevin*

User and group management

Create a new user

There is 2 way to create a user :

- `useradd`
- `adduser`

`useradd`

`useradd` can be “scripted” and used with arguments. It’s a non interactive command

```
1 isen@hostname:~$ sudo useradd isen
2 isen@hostname:~$ sudo useradd isen-with-options -m -s /bin/bash
```

Excepted the error, like all linux commands, if nothing happend ... it’s ok :)

`adduser`

`adduser` is a prompt comman. It ask you all the minimal information to create a user.

```
1 isen@hostname:~$ sudo adduser isen
2 Ajout de l'utilisateur « isen » ...
3 Ajout du nouveau groupe « isen » (1002) ...
4 Ajout du nouvel utilisateur « isen » (1002) avec le groupe « isen » ...
5 Le répertoire personnel « /home/isen » existe déjà. Rien n'est copié
  depuis « /etc/skel ».
6 Nouveau mot de passe :
7 Retapez le nouveau mot de passe :
8 passwd : le mot de passe a été mis à jour avec succès
9 Modification des informations relatives à l'utilisateur isen
10 Entrez la nouvelle valeur ou « Entrée » pour conserver la valeur propos
   ée
11   Nom complet []: Isen User
12   N° de bureau []: 01128736
```

```
13  Téléphone professionnel []: 8917623498
14  Téléphone personnel []: 891726398
15  Autre []: isen.fr
16  Ces informations sont-elles correctes ? [0/n] 0
```

How to change the owner of a file

The `chown` command allows you to change the owner of a file

- `chown isen fic2`
- `chown -R isen rep`

How to change the group of a file

- The command `chgrp` allows you to change the group of a file
 - `chgrp isen fic2`
 - `chgrp -R isen rep`
- The `chown` command allows you to change the group at the same time as the owner:
 - `chown isen:isen fic2`

Edition under LINUX/UNIX in text mode

Under Linux, there are several text-based word processors. Text-based mode simply means editing in a terminal Which implies no menus, no images, no formatting

Advantages

- ```
1 * Ultra-fast
2 * Default on most UNIX/LINUX distributions
3 * Portable and cross-platform
4 * Network-accessible
5 * Very powerful
6 * Programmable
7 * Scalable
8 * Simplified configuration file management.
```

## Disadvantages

- 1 \* Requires practice
- 2 \* Difficult to learn
- 3 \* Aesthetically poor

## Terminal-style text editor

Here are the most common and most used text editors under Linux.

- Vi/Vim
- Emacs
- nano
- jupp / joe

In this course, we will focus on Vim, which is a more accessible port of Vi.

Vim is THE most widely used and practical tool for editing code and configuration files.

---

## Vim Basics

### Modes in VIM

In VIM, there are three main modes for using this word processor.

- Interactive mode
- Insert mode
- Command mode

### Interactive mode

This is the default mode you start with when launching Vim. You are therefore in interactive mode. In this mode, you cannot write text.


This mode allows you to: copy/paste/delete/select...

To move around in vi, you use the HJKL keys, which correspond to Left Down Up Right respectively.

To move around in vim, you use the Left Down Up Right arrow keys.



**Figure 3:** Vim logo

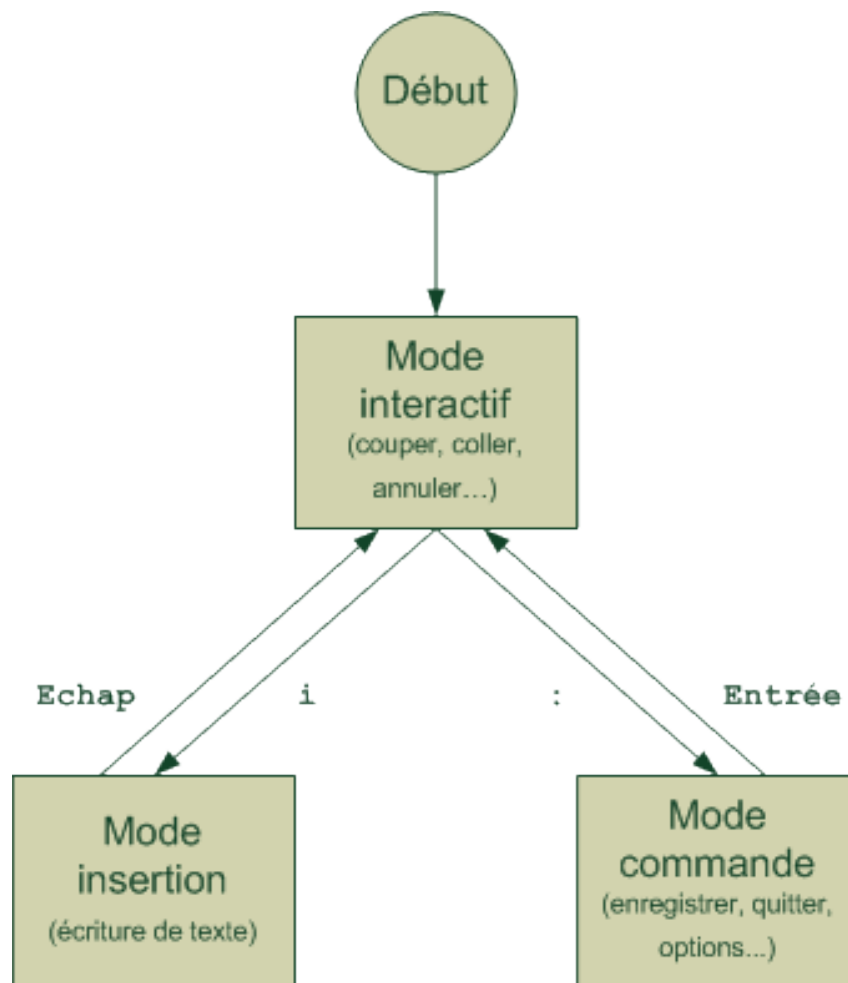

**Figure 4:** Vim move

- 
- v: Selects a portion of the text
  - x: Deletes the current character (cut)
  - y: Copies a line or a word
  - d: Cuts a line or a word
  - p: Paste
  - Combo keys:

- yw/dw: Copy/cut the word
- yy/dd: Copy/cut the current line

## Insert mode

This is the most 'classic' mode. You type text and it is inserted at the cursor location.

There are several ways to enter this mode. One of the most common is to press the i (insert) key.

Very important: To exit any mode, press the Esc key.

## Command Mode

In command mode, you can also:

This mode is the most comprehensive and, above all, the one that gives Vim its full power.

It allows you to run commands such as "quit," "save," etc. You can also use it to enable Vim options:

- syntax highlighting (:syntax on )
- display line numbers (:set number)
- intelligent indentation (:set smartindent)

## Executing a Command in VIM

While in command mode, you can retrieve information from the shell (the console) such as ls, locate, cp, etc.

- either by typing certain commands like:
  - ":ls"
  - ":locate"
- or by launching a subshell:
- ":sh" (for this mode, once the session ends with exit or CTRL+d, the shell returns control to VIM).

To activate this mode, you must be in interactive mode and press the colon ":". You will validate the command with the Enter key and then return to interactive mode.

**action on the file**

In command mode, you can also:

- replace text:

:s/old/new/g

- find text:

/string

To find the next occurrence of 'string', press "n". When the document finds nothing at the end of the document, it tells you to start over.

- save:

:w

- quit:

:q